SOLUTION

Drinking Water

Kitchen RO/UF and centralised purifiers · 10–2400 L/day

MRP RANGE

₹15,000 – ₹1,00,000

MRP inclusive of GST. Kitchen units 15K–25K; centralised 25–100 LPH units 20K–1L.

Drinking water is the only treatment surface the customer interacts with daily. The kitchen RO sits beside the tap. The centralised unit sits in an institutional pantry serving fifty people. Across both, the standard is the same: removed dissolved contaminants, removed microbes, preserved minerals where possible, transparent reject ratio.

CAPACITY TIERS

Kitchen RO	10–15 LPH	Wall-mount or under-sink · single family
Kitchen UF	10–15 LPH	Zero-reject for sub-200 ppm municipal supply
Centralised 25 LPH	600 L/day	Small offices, clinics, labs · 25–50 people
Centralised 50 LPH	1,200 L/day	Mid-size offices, school canteens · 50–100 people
Centralised 100 LPH	2,400 L/day	Large offices, hospitals · 100–200 people

KEY SPECIFICATIONS

RO variant treatment
5-stage: sediment → carbon → RO membrane → UV → post-filter

UF variant treatment
4-stage: sediment → activated carbon → UF membrane → UV

Membrane performance
RO: ≥97% salt rejection, TFC membrane, recovery 30–55% by SKU

UF pore size
0.01–0.1 micron · removes bacteria, cysts, colloidal particles

UV dose
254 nm, ≥12–30 mJ/cm² depending on capacity

Storage
Kitchen: 8–12 L · Centralised: separate tank (add-on)


Suitable inlet TDS
RO variants: up to 4,000 ppm · UF variants: below 300 ppm

Construction
Kitchen: food-grade ABS/PP · Centralised: SS304 skid frame

WATER PROBLEMS ADDRESSED

- High TDS water (>500 ppm): bitter taste, kidney stress, scale in kettles
- Lead and nitrates from contaminated groundwater
- Bacteria and cysts: gastrointestinal illness from municipal cross-contamination
- Chlorine taste and odour from municipal disinfection

INSTALL CONTEXT

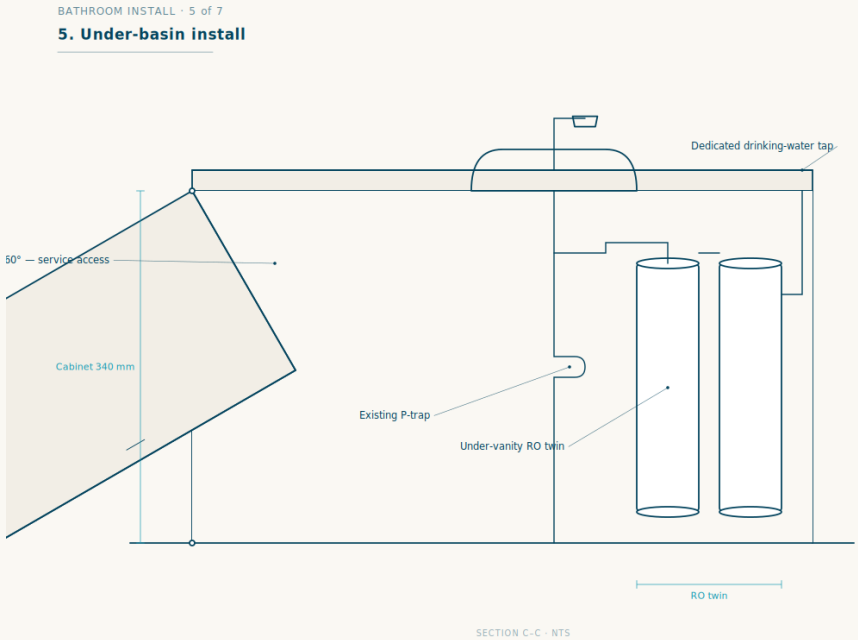

Under-sink kitchen

AMC SCOPE

Quarterly visits: pre-filter cartridge change, UV lamp check, TDS log. Annual: RO membrane assessment. UV lamp replacement at 8,000 hours.

Two litres a person, every day, with no surprises. The standard is the standard.

Specifications subject to revision. Confirm capacities at site survey.